
Footpath Planks

100% Recycled Plastic

Manufactured from 100% waste plastic, this material choice relieves pressure on landfill. Frostproof and rot-resistant, it repels water making it suitable for outdoor use all year round, without any need for painting or additional treatments, and comes with a 20-year warranty.

A safe choice. Tried and tested over many years, our footpath planks have an enviable track record. Whether sun, sea, salt or sand, they are splinter-free, non-toxic, free of additives or preservatives, UV-resistant and extremely durable.

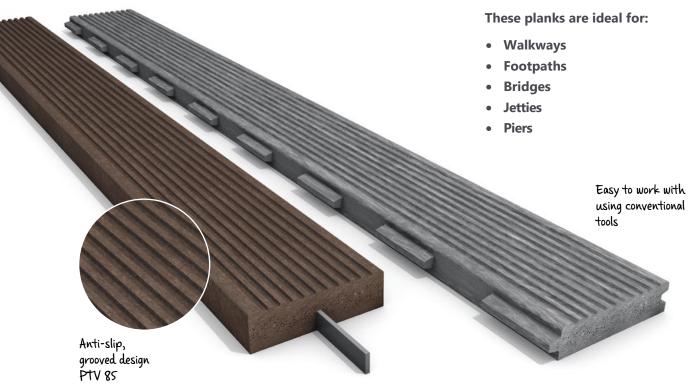

Overview of spans		
Footpath plank (cm)	Uniformly distributed load: 3 kN/m ² Point load: 1.5 kN	Uniformly distributed load: 5 kN/m² Point load: 2 kN
4 × 17 ¹	*60 cm	60 cm
4 × 17 reinforced ¹	*100 cm	*100 cm
4×19.7	53 cm	46 cm
4 × 19.7 reinforced	*80 cm	80 cm
4.8 × 16.5	* 60 cm	56 cm
4.8 × 16.5 reinforced	*80 cm	80 cm
6 × 19.7	*80 cm	80 cm
6 × 19.7 reinforced	*100 cm	100 cm

 $^{^1}$ two footpath planks each measuring 4 × 17 cm with tongue and groove were tested in combination | * Maximum span due to the creep properties



- Flat steel: 6 x 25, galvanized

 Centred on the underside

 Ends approx.7 before end of profile

 Flat steel fixed with clips

 Double reinforcement available on request

 For planks 6 x 19.7 stronger reinforcement



Footpath planks



- Lengths: from 100 300 cm
- Thickness: 4/4.8/6 Width: 17 / 19.7 depending on version
- Splinter-free, rot-proof, free of harmful substances
- Available with steel reinforcement for wider spans



Steel reinforced to span wider gaps







Brown

Footpath planks with tongue and groove



- Lengths: from 100 300 cm
- Thickness: 4 cm, width: 17 cm
- Overall strength improved by tongue and groove design
- Available with steel reinforcement for wider spans







Colors:



Grey

Brown